


**Description**

KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC

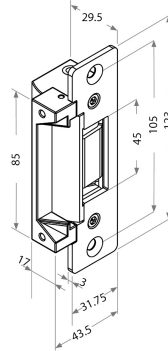

**Technical Features**

Function & Operation	Electric Strike
Summary of Features	See advance features

Options n/a

**Dimensions**

Dimensions See drawing

**Finishes**

Finishes Available Stainless Steel

**Certification**

European Norm	No Harmonised European Norm
Product Classification	n/a (No Harmonised European Norm)
EC Certificate of Conformity No.	n/a (No Harmonised European Norm)
Certifire No.	n/a (No Harmonised European Norm)
Declaration of Performance	n/a (No Harmonised European Norm)
Other Test Evidence	20210212-083912 Rev A Fire Test

**BIM Assist™**

**BC(A)R Assist™\***

**Guarantee**

**1 Year**

Last Reviewed

16/07/2024

\* ROI Only

**Description**

KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC

**Features**

- Dual Operating Voltage 12 or 24v DC
- Non Handed Fully Reversible
- 1500lbs (680kg Holding Force)
- Brushed Stainless Steel
- Fire Rated to FD30 & FD60 (UK tested)
- Fail Safe/Fail Secure Reversible
- Monitored
- Includes intumescent strip

### Description


KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC



## Specification Text

## GENERAL ACCESS CONTROL

- Manufacturer: KCC Group
- Product reference: KES-FR/GK450M-ST
- Type: KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC
- Size: See drawing
- Material/ finish: Stainless Steel

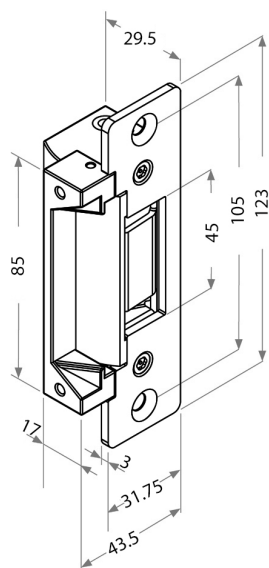

*For the purpose of continual product development, KCC reserves the right to change specifications without notice.  
Please accept all dimensions as approximate. E&OE. © KCC Group 2025.*

[www.thekccgroup.com](http://www.thekccgroup.com)