


Description

KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC

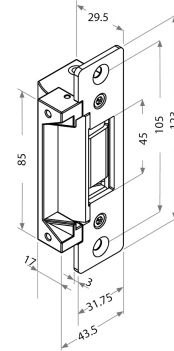

Technical Features

Function & Operation	Electric Strike
Summary of Features	See advance features

Options n/a

Dimensions

Dimensions See drawing

Finishes

Finishes Available Stainless Steel

Certification

European Norm	No Harmonised European Norm
Product Classification	n/a (No Harmonised European Norm)
EC Certificate of Conformity No.	n/a (No Harmonised European Norm)
Certifire No.	n/a (No Harmonised European Norm)
Declaration of Performance	n/a (No Harmonised European Norm)
Other Test Evidence	n/a

BIM Assist™

BC(A)R Assist™*

Guarantee

1 Year

Last Reviewed

05/07/2022

* ROI Only

Description

KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC

**Features**


- Non Handed Fully Reversible
- 1500lbs (680kg Holding Force)
- Brushed Stainless Steel
- Fire Rated to FD30 & FD60 (UK tested)
- Fail Safe/Fail Secure Reversible
- Monitored
- Includes intumescent strip

KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC



GENERAL ACCESS CONTROL

- Manufacturer: KCC Group
- Product reference: KES-FR/GK450M-ST
- Type: KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC
- Size: See drawing
- Material/ finish: Stainless Steel

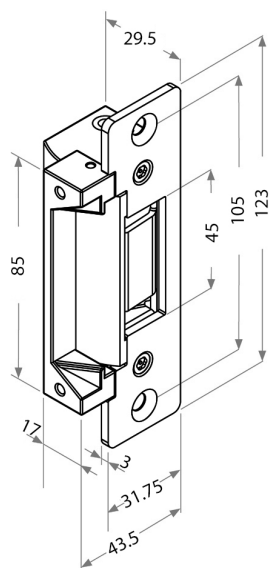

*For the purpose of continual product development, KCC reserves the right to change specifications without notice.
Please accept all dimensions as approximate. E&OE. © KCC Group 2024.*