

Description

Stoebich Fibershield® Fire Curtain for Enclosed Protection



Product Summary

Fire curtain that when activated, provides enclosed protection against fire

Certification		BIM Assist™	
European Norm	EN 13501-2:2016	CE	
Product Classification	Without Sprinklers: E120, EW90. With Sprinklers E120		
EC Certificate of Conformity No.	n/a (No Harmonised European Norm)	BC(A)R Assist™*	
Certifire No.	n/a	Guarantee	1 Year
Declaration of Performance	n/a (No Harmonised European Norm)	Last Reviewed	24/07/2020
Other Test Evidence	n/a	* ROI Only	

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2025.

www.thekccgroup.com

Description

Stoebich Fibershield® Fire Curtain for Enclosed Protection

**Features & Characteristics**


- Fire curtain that when activated, provides enclosed protection against fire
- Protected area can be rectangular or polygon with angles between 30° and 130°
- No support elements are required despite the corner design
- Open systems that close against a wall by use of special guide rails
- Spring-loaded closing strip presses tightly against the ceiling providing closure
- Can be closed without external energy by means of the 'Gravigen' drive system that is incorporated as standard
- Tested to 10,000 cycles
- Closing action of top to bottom
- Fire Resistance: Without Sprinklers E120, EW90 . With sprinklers (EI120 see EI Casing)
- Fabric Options:
 - Ecotex
 - Heliotex
- Fire load free zone:
 - Ecotex: EI 30/60/90 minutes - 100/150/200 cm
 - Heliotex: EI 30/60/90 minutes - 20/30/50 cm

System Components & Dimensions

- ① Smoke detector
- ② Casing
- ③ Side guide
- ④ Tubular motor
- ⑤ Fabric
- ⑥ Closing element
- ⑦ Coil
- ⑧ Control module
- ⑨ Control with operating unit
- ⑩ Manual release


Dimensions

- Fabric: Ecotex 1100 A2
 - System width (SL): <50m, Drop length (AL): <3m
 - Casing depth (t): 490mm
 - Casing height (h): 125mm
 - System width (SL): <50m, Drop length (AL): >3m - <=6m
 - Casing depth (t): 490mm
 - Casing height (h): 225mm
- Fabric: Heliotex EW90
 - System width (SL): <50m, Drop length (AL): <2.2m
 - Casing depth (t): 490mm
 - Casing height (h): 125mm
 - System width (SL): <50m, Drop length (AL): >2.2m - <=2.5m
 - Casing depth (t): 490mm
 - Casing height (h): 225mm
 - System width (SL): <50m, Drop length (AL): >4.5m - <=6m
 - Casing depth (t): 490mm
 - Casing height (h): 450mm

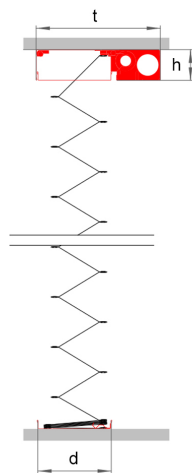


Standard Casing Open

- t: 190mm
- h: 225, 450mm
- d=290mm

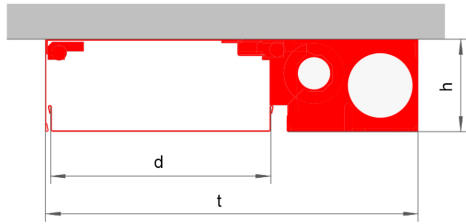


Standard Casing Closed

- t: 490mm
- h: 225, 450mm
- d=290mm

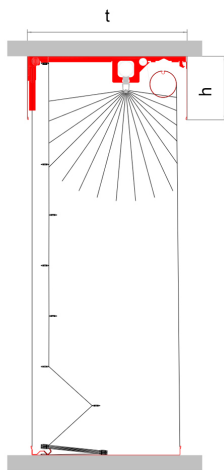


EI Casing Open

- t: 600mm
- h: 240mm

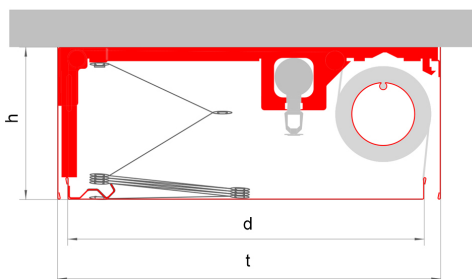

EI Casing Closed

- t: 600mm
- h: 240mm
- d: 560mm

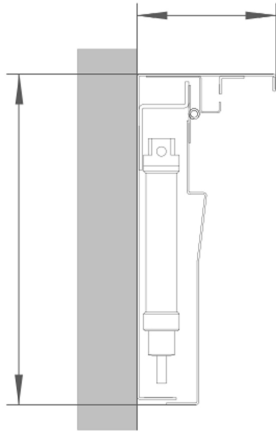

Guide Rails for Open Polygons

- a: 117mm
- b: 278mm

Description

Stoebich Fibershield® Fire Curtain for Enclosed Protection

**Specification Text****FIRE AND SMOKE CURTAIN SPECIFICATION**

- Manufacturer: Stoebich
- Product reference: KFSC-FS CURTAIN S
- Type: Stoebich Fibershield® Fire Curtain for Enclosed Protection
- Fire Resistance: EI30, EI60, EI90, EW90. EI With Sprinklers
- Fire load free zone:
 - Ecotex EI 30/60/90 minutes - 100/150/200 cm
 - Heliotex EI 30/60/90 minutes - 20/30/50 cm
- Fabric: Ecotex 1100 A2
- System width (SL): <50m, Drop length (AL): <3m
- Casing depth (t): 490mm
- Casing height (h): 125mm
- System width (SL): <50m, Drop length (AL): >3m - <=6m
- Casing depth (t): 490mm
- Casing height (h): 225mm
- Fabric: Heliotex EW90
- System width (SL): <50m, Drop length (AL): <2.2m
- Casing depth (t): 490mm
- Casing height (h): 125mm
- System width (SL): <50m, Drop length (AL): >2.2m - <=2.5m
- Casing depth (t): 490mm
- Casing height (h): 225mm
- System width (SL): <50m, Drop length (AL): >4.5m - <=6m
- Casing depth (t): 490mm
- Casing height (h): 450mm

