


Description

KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC



Technical Features

Function & Operation Electric Strike
Summary of Features See advance features

Options n/a

Dimensions

Dimensions See drawing

Finishes

Finishes Available Stainless Steel

Certification

European Norm No Harmonised European Norm
Product Classification n/a (No Harmonised European Norm)
EC Certificate of Conformity No. n/a (No Harmonised European Norm)
Certifire No. n/a (No Harmonised European Norm)
Declaration of Performance n/a (No Harmonised European Norm)
Other Test Evidence 20210212-083912 Rev A Fire Test

BIM Assist™

BC(A)R Assist™*

Guarantee

1 Year

Last Reviewed

16/07/2024

* ROI Only

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2026.

Description

KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC



Features

- Dual Operating Voltage 12 or 24v DC
- Non Handed Fully Reversible
- 1500lbs (680kg Holding Force)
- Brushed Stainless Steel
- Fire Rated to FD30 & FD60 (UK tested)
- Fail Safe/Fail Secure Reversible
- Monitored
- Includes intumescent strip

Description


KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC



Specification Text

GENERAL ACCESS CONTROL

- Manufacturer: KCC Group
- Product reference: KES-FR/GK450M-ST
- Type: KCC Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC
- Size: See drawing
- Material/ finish: Stainless Steel

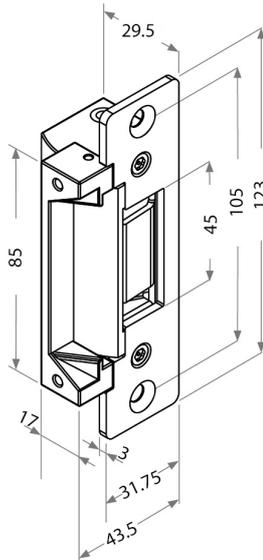

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2026.