


**Description**

Securefast Fire Rated\* ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC. \*KES-SINAL900-1/WHT Intumescent Required

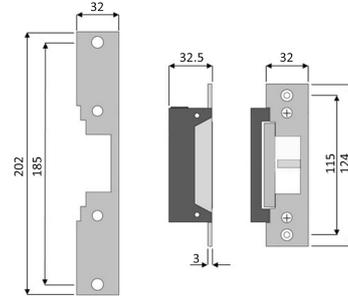

**Technical Features**

Function & Operation      Electric Strike  
Summary of Features      See advance features

Options      n/a

**Dimensions**

Dimensions      See drawing

**Finishes**

Finishes Available      Stainless Steel

**Certification**

European Norm      EN14846  
Product Classification      NPD A B ① ① ① NPD NPD NPD  
EC Certificate of Conformity No.      See DOP  
Certifire No.      n/a  
Declaration of Performance      Declaration of Performance - AL900 Electric Release 7-1-22  
Other Test Evidence      n/a

**BIM Assist™**

**BC(A)R Assist™\***

**Guarantee**

**1 Year**

Last Reviewed

09/06/2025

\* ROI Only

*For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2026.*


#### Description

Securefast Fire Rated\* ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC. \*KES-SINAL900-1/WHT Intumescent Required



#### Features

- 1000lbs Holding Force (4448N / 434kgf)
- 12/24V AC/DC on site selectable
- AC Fail Secure only, selectable
- DC Fail Locked/Fail Unlocked selectable
- Monitored (Latch)
- Fire rated with KES-SINAL900-1/WHT Intumescent for use on 30 & 60min timber doors
- Long and short faceplates are included
- 10, 25 & 50mm extension lips available



#### Compatibility

- Securefast: SEU511/2/3/4, SEU771, SEU1092.2, SEU1094.2, SM1230, SLA520
- Alpro: A5245101/2/3/4, A5245701/2/3/4
- Adams Rite: AAR4710/1/2/3/400, AAR4750/1/2/3/400
- Assa: 8761/50/70

**Description**


Securefast Fire Rated\* ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC. \*KES-SINAL900-1/WHT Intumescent Required



**Specification Text**

GENERAL ACCESS CONTROL

- Manufacturer: Securefast
- Product reference: KES-AL900M
- Type: Securefast Fire Rated ANSI Electric Strike Monitored & Site Selectable Fail Lock / Fail Open – 12 & 24vDC
- Size: See drawing
- Material/ finish: Stainless Steel

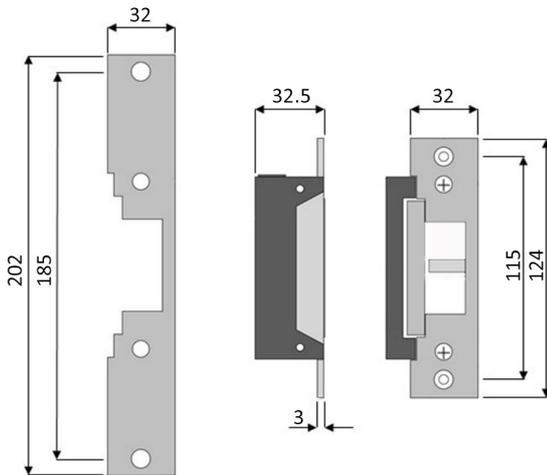

*For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2026.*