


Description

Abloy Handle Operated Electro Mechanical Panic Security Lock c/w Electro-mechanically Controlled Clutch for Single Leaf Doors.
55mm Backset (809NE00135540000)

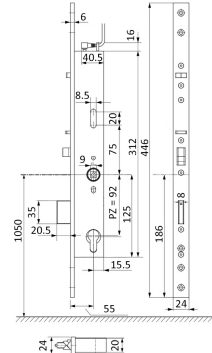

Technical Features

| | |
|----------------------|--|
| Function & Operation | Handle operated electro mechanical panic security lock for single leaf doors |
| Summary of Features | See advanced features |

| | |
|---------|-----------------------------------|
| Options | Backset: 35, 40, 45, 55, 65, 80mm |
|---------|-----------------------------------|

Dimensions

| | |
|------------|-------------|
| Dimensions | See drawing |
|------------|-------------|

Finishes

| | |
|--------------------|-----------------------------|
| Finishes Available | Forend: Satin Chrome Plated |
|--------------------|-----------------------------|

Certification

| | |
|----------------------------------|--|
| European Norm | hEN179, hEN1125, EN14846 |
| Product Classification | hEN179: ③ ⑦ ⑦ B ① ③ ④ ② A (B D) hEN1125: ③ ⑦ ⑦ B ① ③ ② ② (A B) B EN14846: ③ S ⑥ C-L ⑥ ① ③ |
| EC Certificate of Conformity No. | See DOP |
| Certifire No. | n/a |
| Declaration of Performance | DoP-809NE0.02 |
| Other Test Evidence | n/a |

BC(A)R Assist™*

Guarantee

1 Year

Last Reviewed

09/06/2025

* ROI Only

Description

Abloy Handle Operated Electro Mechanical Panic Security Lock c/w Electro-mechanically Controlled Clutch for Single Leaf Doors.
55mm Backset (809NE00135540000)



Features



- Self-activating panic lock for single leaf doors with electro-mechanically clutch controlling the external lever handle
- Egress always possible utilising the panic function design
- Fulfills the requirements for burglary-resistant doors, fire doors, emergency exit doors and panic doors in accordance with EN 179, EN 1125 & EN 14846
- A mechanical sequence control system reliably prevents unwanted extension of the bolt when the door is open
- Suitable for DIN left / Right applications
- Panic side outwards or inwards opening, site reversible
- The fail-locked or fail-unlocked operating mode can be switched on the lock
- Integrated electronic control device for external triggering or connection to the ASSA ABLOY Hi-O bus System
- Integrated monitoring functions via contactless sensors for status query via the external OneSystem IO module:
 - Door status via strike plate contact
 - Bolt retracted and bolt extended
 - Cylinder monitoring
 - Handle follower monitoring inside and outside
 - Status handle clutch engaged/disengaged
- Solid surface hardened deadbolt with 20mm throw, transverse shear stress 20,000N
- Compatible with Euro profile cylinders
- 6mm forend for added security
- Bolt through fixings

Technical Characteristics



- Input operating voltage: 12 -24 V DC +/- 15%
- Rated current consumption: 50 mA (24 V)/60 mA (12 V)
- Current consumption (clutch active): 80 mA (24V/ 120 mA (12V)
- Backset options: 35, 40, 45, 55, 65, 80 mm
- Lock centres: 92 mm (prepared for Euro profile cylinder)
- Bolt throw: 20.5 mm
- Material face plate: Chrome-plated steel
- Handle follower: 9 mm
- Monitoring: Yes
- Top locking: No
- Self-locking system: Yes
- Door type: Aluminium/steel profile
- Functions: Handle-operated
- Door system: Single-leaf door




KEL-N59550

- An Abloy connecting cable is required and must be specified separately

Description

Abloy Handle Operated Electro Mechanical Panic Security Lock c/w Electro-mechanically Controlled Clutch for Single Leaf Doors.
55mm Backset (809NE00135540000)

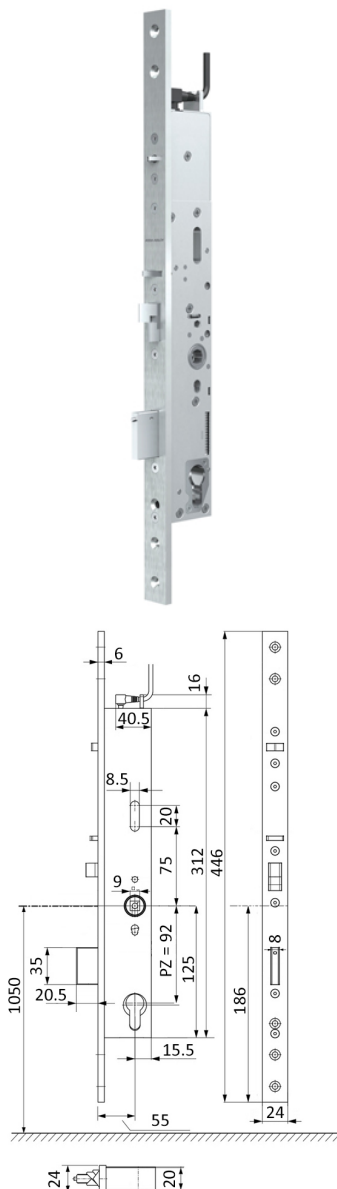

Specification Text

ELECTROMECHANICALLY OPERATED LOCKS & STRIKING PLATES

- Standard: To BS EN 14846.
- Electromechanically operated locks & striking plates: CE marked.
- Manufacturer: Abloy
- Product reference: KEL-809NE-55
- Type: Abloy Handle Operated Electro Mechanical Panic Security Lock c/w Electro-mechanically Controlled Clutch for Single Leaf Doors. 55mm Backset (809NE00135540000)

- Material/ finish: Forend: Satin Chrome Plated

- Additional requirements: n/a

PERFORMANCE SPECIFICATION FOR ELECTROMECHANICALLY OPERATED LOCKS & STRIKING PLATES

- Standard: To BS EN 14846.
- Electromechanically operated locks & striking plates: CE marked.
- Minimum classification grades:
- Category of use: 3.
- Durability: S
- Door mass: 6
- Suitability for use on fire/ smoke doors: C
- Safety: No Requirement.
- Corrosion resistance: L
- Security: 6
- Status indication: 1
- Electrical manipulation: 3
- Material/ finish: Forend: Satin Chrome Plated
- Additional requirements: n/a