



Description

KCC Heavy Duty Modular Mortise Sashlock c/w Anti-Rattle Adjustable Strike Plate & Anti-Friction Latch



Technical Features

Cylinder Style	Euro Profile
Operation by Key and / or Cylinder Turn	Single Throw of Deadbolt with single rotation of Key. Key also withdraws latchbolt
Operation by Lever Handle / Thumbturn	Latchbolt withdrawn by lever handle from either side
Operation by Privacy Indicator	n/a
Positive Grip Follower Feature	Yes
Springing	Individual spring mechanism for both latch bolt & lever handle
Handing	Non handed with easily reversible latchbolt
Cylinder	Euro piercing to suit euro profile cylinder
Furniture	Suitable for Bolt Through Lever Handles & Escutcheons
Forend Style	Radius
Rebate Options	KL-1900A (13MM) KL-1900B (25MM)

Dimensions

Case Depth A (mm)	87
Case Backset B (mm)	55
Case Centres C (mm)	72
Case Height D (mm)	164
Other Dimensions (mm)	n/a
Follower Dimension (mm)	8
Forend Dimension (mm)	H235 x W24 x 3
Fixing Centres (mm)	38
Deadbolt Dimension (mm)	H35 x D22
Latchbolt Dimension (mm)	H32.5 x D12.5

Finishes

Forend Finish	Satin Stainless Steel
---------------	-----------------------

Certification

European Norm	hEN12209
Product Classification	③X⑤①①①F③B C②①
EC Certificate of Conformity No.	1121-CPD-AG0090
Certifire No.	CF5234V2
Declaration of Performance	KCC-010
Other Test Evidence	n/a

BIM Assist™

CE

Certifire

BC(A)R Assist™*

Guarantee

5 Years

Last Reviewed

25/09/2017

* ROI Only

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2025.


Description

KCC Heavy Duty Modular Mortise Sashlock c/w Anti-Rattle Adjustable Strike Plate & Anti-Friction Latch



Specification Text

- 515.192
DOOR LOCKS
- Standard: To BS EN 12209.
 - Manufacturer: KCC Group
 - Product reference: KL-1901RAR
 - Type: Heavy Duty Modular Mortise Sashlock c/w Anti-Rattle Adjustable Strike Plate & Anti-Friction Latch
 - Backset: 55mm
 - Material/ finish: [SPECIFY FINISH]
 - Keying: n/a
- 525 PERFORMANCE SPECIFICATION FOR DOOR LOCKS AND LATCHES
- Standard: To BS EN 12209.
 - Minimum classification grades:
 - Category of use: 3
 - Durability: X
 - Door mass and closing force: 5
 - Suitability for use on fire/ smoke doors: 1
 - Safety: 0.
 - Corrosion resistance and temperature: F
 - Security and drill resistance: 3
 - Field of door application: B
 - Type of key operation and locking: C
 - Type of spindle operation: 2
 - Key identification requirement: 0
 - Backset: 55mm
 - Material/ finish: [SPECIFY FINISH]
 - Keying: n/a

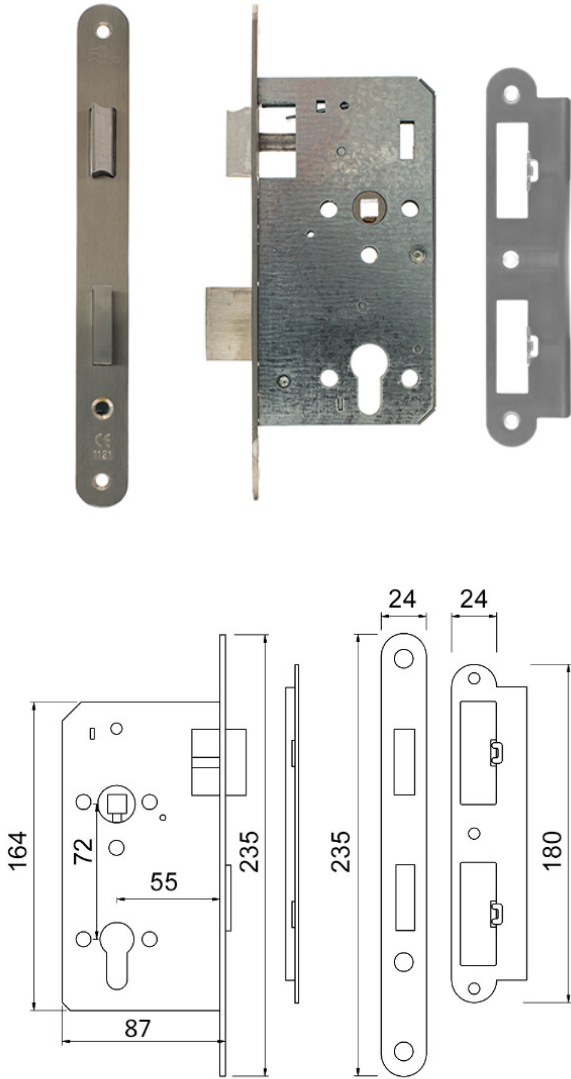

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2025.