


Description

SE Controls Intelligent Controller & PSU. Drives Actuators in a Smoke Control and / or Environmental Ventilation System. 30 Amp (FCS12001030)



Technical Features

Function & Operation Controller and PSU that drives 2 wire, 24vDC SE Controls actuators in a smoke control and / or an environmental ventilation system

Summary of Features See advanced features

Options The panel is also available in 60A/90A/120A/150A and multi-zone versions

Dimensions

Dimensions W400 x H600 x D250mm

Finishes

Finishes Available Grey

Certification

European Norm EN12101-10

Product Classification Conform

EC Certificate of Conformity No. See DOP

Certifire No. n/a

Declaration of Performance IFCC1089

Other Test Evidence n/a

BIM Assist™

CE

BC(A)R Assist™*

Guarantee

1 Year

Last Reviewed

25/07/2019

* ROI Only

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2025.

Description

SE Controls Intelligent Controller & PSU. Drives Actuators in a Smoke Control and / or Environmental Ventilation System. 30 Amp (FCS12001030)



Features

- Powerful intelligent controller that drives 2 wire, 24vDC SE Controls actuators in a smoke control and / or an environmental ventilation system
- Operating from a 230vAC 13A supply, the OS2 SHEVTEC 30A Controller can deliver up to 30A to drive 24V motorised actuators and / or magnetic catches
- Battery backup is provided for continued operation in the event of a mains supply failure
- This Controller can be mounted locally to the devices to be operated or in a centralised location. Each Controller can operate independently or can be linked to others to produce a networked control system. The networked control system in turn can operate standalone or be linked to a building management system
- The panel is also available in 60A/90A/120A/150A and multi-zone versions


Technical Characteristics



- Supply 230vAC 50/60 Hz from a 13A supply
- Output nominal 24vDC 4-Channels combined output not to exceed 8A per channel
- Backup battery 2 x 12vDC 22.0Ah sealed lead-acid batteries
- Battery standby time 72 hours with maximum 100mA standby drain on PER permanent*
- Expected battery life 3+ years @ 25°C
- Real time clock battery life is 10 years
- IP rating 32
- Humidity range 10 to 90% Non-condensing
- Storage -20 to +50°C
- Operating temperature for Control Panel (not including batteries) -5 to 40°C**
- Cable entry via 32 x 20mm top mounted cable glands
- Internal temperature sensor installed to provide optimal battery charging compensation as the ambient temperature changes
- * Standby drain current comprises of enabled fire inputs, communication cards, and other loads connected to PER
- ** Operation at elevated temperatures may reduce battery life

Description

SE Controls Intelligent Controller & PSU. Drives Actuators in a Smoke Control and / or Environmental Ventilation System. 30 Amp (FCS12001030)

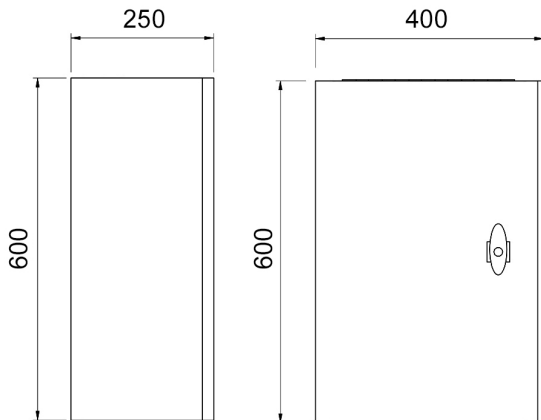

Specification Text

SMOKE / ENVIRONMENTAL VENTILATION SYSTEM CONTROLS

- Manufacturer: SE Controls
- Product reference: KWAC-SE/OS2 SHEVTEC/30A
- Type: Intelligent Controller. Drives Actuators in a Smoke Control and / or Environmental Ventilation System. 30 Amp
- Dimensions: W400 x H600 x D250mm
- Finish: Grey
- Controls: OS2