


Description

KCC QBIQ Full Glass, Double Glazed Wall System c/w 31mm Vertical or Horizontal Discreet Glazing Strip

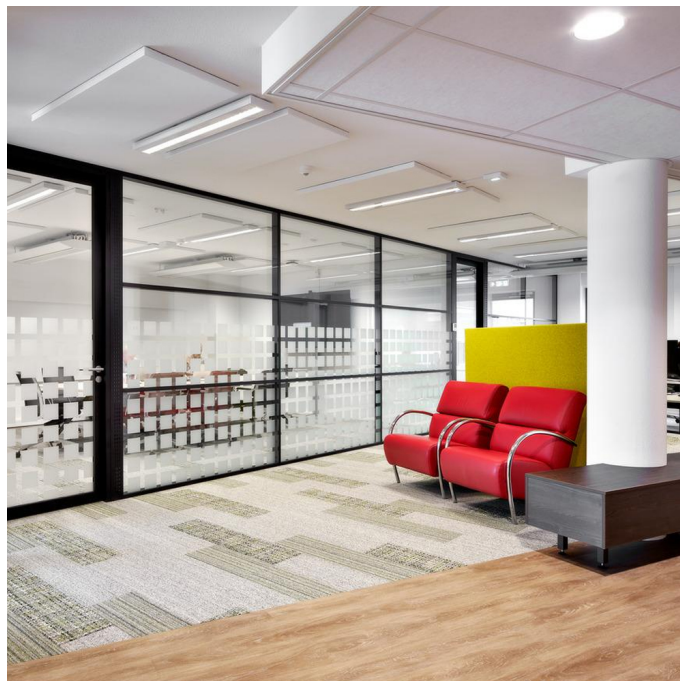

Product Summary

It's amazing what an effect you can achieve with a discreet glazing strip, yet it offers so much freedom of expression. The 31mm strip between sections creates a sleek, slimline look & feel and offers countless options. IQ Pro is available in double glazed versions, as well as options for horizontal and vertical designs. Non fire rated

Certification

European Norm	No Harmonised European Norm
Product Classification	n/a (No Harmonised European Norm)
EC Certificate of Conformity No.	n/a (No Harmonised European Norm)
Certifire No.	n/a
Declaration of Performance	n/a (No Harmonised European Norm)
Other Test Evidence	n/a

BIM Assist™

BC(A)R Assist™*

Guarantee

2 Years (Conditional)

Last Reviewed

14/08/2019

* ROI Only

For the purpose of continual product development, KCC reserves the right to change specifications without notice.
Please accept all dimensions as approximate. E&OE. © KCC Group 2025.

www.thekccgroup.com

Description


KCC QBIQ Full Glass, Double Glazed Wall System c/w 31mm Vertical or Horizontal Discreet Glazing Strip



Features

- Full glass, double glazed wall & door system
- 31mm vertical or horizontal glazing strip creates a discreet, sleek, slimline look & feel and countless design options (vertical example shown left)
- Minimalist floor and ceiling profiles of 33 mm in height
- High acoustic values
- Wide range of colours and finishes are available
- Extensive selection of compatible doors
- Non fire rated

Technical Characteristics

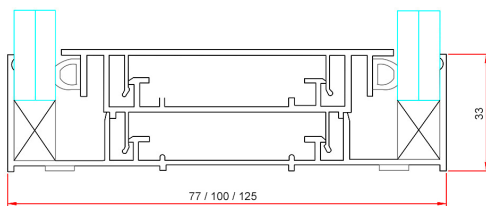

IQ Pro Floor & Ceiling Track

- Wall thickness: 77, 100 or 125 mm
- Floor Track: Aluminium profile, 33 mm high with acoustic tape providing sound-proofing between the track and the floor
- Ceiling Track: Aluminium profile, 33 mm high with acoustic tape providing sound-proofing between the track and the ceiling
- Glazing Strip: Vertical or horizontal, W31mm with depth to match the wall thickness
- Glazed wall sections: Up to 3000mm in height, double glazed, 66.A2 (with a transparent plastic interlayer – PVB, for enhanced acoustic performance) or 66.2 glass (without PVB), 2 x 12.76mm thickness.
- Clad wall sections: Up to 1200mm in height as standard, other sizes are available. Sections can include dry wall in plaster, vinyl, melamine or in steel
- Doors: Full glass, 10mm tempered, up to a maximum height of 2700mm (can be increased under special arrangement)
- Doors: Wooden door with high pressure laminate (HPL) or veneer finish
- Door frames: Aluminium block frame with single and / or double rubber seal
- Profile metallic finishes: Alu chrome, RAL9006 (white aluminium)
- Profile colours: Powder coated in any RAL colour and with a gloss level of 30% or 70%
- Acoustic STC rating: From $R_w=44\text{dB}(1)$ till $R_w=56\text{dB}(1)$

(1)=subject to final design and site conditions




Qbiq Projects

- Double glass partition c/w vertical and horizontal glazing strip



Qbiq Projects

- Kitchen & pantry built into an IQ-PRO glass wall

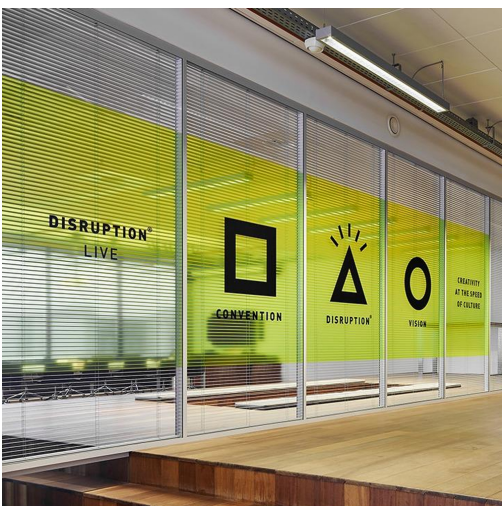

Qbiq Projects

- Double glass partition c/w blinds between the glass



Qbiq Projects

- IQ PRO using extra-high partition




Qbiq Projects

- First floor meeting rooms using IQ-PRO

Description

KCC QBIQ Full Glass, Double Glazed Wall System c/w 31mm Vertical or Horizontal Discreet Glazing Strip

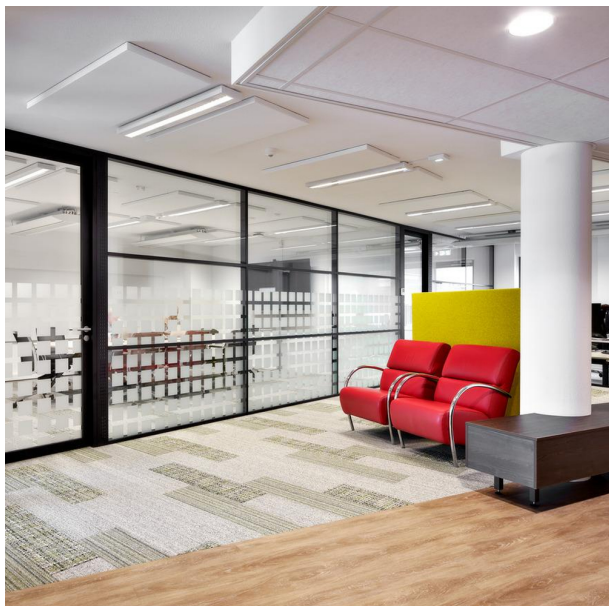

Specification Text

GLAZED WALL SPECIFICATION

- Manufacturer: KCC Group / Qbiq B.V.
- Product reference: KW-IQ PRO NFR
- Type: KCC QBIQ Full Glass, Double Glazed Wall System c/w 31mm Vertical or Horizontal Discreet Glazing Strip
- Fire: None Fire Rated

- TRACK

- Thickness: 77, 100 or 125 mm [SPECIFY]
- Floor & Ceiling: Aluminium profile, 33 mm high with acoustic tape providing sound-proofing between the track and the floor

- GLAZED WALL SECTIONS

- Up to 3000mm in height, double glazed, 66.A2 (with a transparent plastic interlayer – PVB, for enhanced acoustic performance) or 66.2 glass (without PVB), 2 x 12.76mm thickness*.
- Glazing Strip: Vertical or horizontal, W31mm with depth to match the wall thickness

* Glass selection is determined by the Acoustic Target

- CLAD WALL SECTIONS

- Up to 1200mm in height as standard, other sizes are available. Sections can include dry wall in plaster, vinyl, melamine or in steel

- DOORS & FRAMES

- Full glass, 10mm tempered, up to a maximum height of 2700mm
- Wooden door with high pressure laminate (HPL) or veneer finish
- Frames: Aluminium block frame with single and / or double rubber seal

- FINISHES

- Profile metallic finishes: Alu chrome, RAL9006 (white aluminium)
- Profile colours: Powder coated in any RAL colour and with a gloss level of 30% or 70%

- ACOUSTIC, RW

- From Rw=44dB to Rw=56dB*

*Dependent upon the final design