


Description

KCC ANSI Electric Strike Site Selectable Fail Lock / Fail Open. Supplied with Long & Short Faceplates

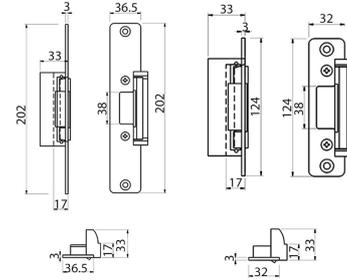

Technical Features

Function & Operation	Electric Strike
Summary of Features	2000lbs jaw strength pulling test, site selectable fail lock / fail open. Site selectable 12 or 24v DC, status LED lights, stainless steel faceplate, current draw 250mA @ 12vDC & 150mA @ 24vDC. Operating temperature -10 to 45 degrees C

Options n/a

Dimensions

Dimensions Long Plate: L202 x W36.5 x D33. Short Plate: L124 x W32 x D33

Finishes

Finishes Available Stainless Steel

Certification

European Norm	No Harmonised European Norm
Product Classification	n/a (No Harmonised European Norm)
EC Certificate of Conformity No.	n/a (No Harmonised European Norm)
Certifire No.	n/a (No Harmonised European Norm)
Declaration of Performance	n/a (No Harmonised European Norm)
Other Test Evidence	n/a

BIM Assist™

BC(A)R Assist™*

Guarantee

1 Year

Last Reviewed

09/01/2020

* ROI Only

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2026.


Description

KCC ANSI Electric Strike Site Selectable Fail Lock / Fail Open. Supplied with Long & Short Faceplates

Specification Text

GENERAL ACCESS CONTROL

- Manufacturer: KCC Group
- Product reference: KES-GK311/1224
- Type: ANSI Electric Strike Site Selectable Fail Lock / Fail Open
- Size: Long Plate: L202 x W36.5 x D33 or Short Plate: L124 x W32 x D33
- Material/ finish: Stainless Steel

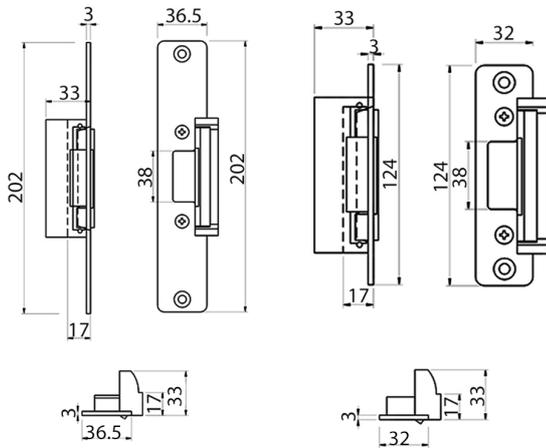

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2026.