

Description

Tormax Light Frame Revolving Door System - Servo Automatic Operation. Non Fire Rated



Product Summary

Light frame revolving door system for doors from 1.8m and up to 3.0m in diameter and with servo automatic operation. Non fire rated

Certification

| | |
|----------------------------------|--|
| European Norm | EN16005: 2012 |
| Product Classification | Complies / exceeds the design guidelines as depicted |
| EC Certificate of Conformity No. | n/a (No Harmonised European Norm) |
| Certifire No. | n/a |
| Declaration of Performance | T1332 |
| Other Test Evidence | n/a |

BIM Assist™

CE

BC(A)R Assist™*

Guarantee

10 Years Mechanical

Last Reviewed

09/03/2020

* ROI Only

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2025.

Description

Tormax Light Frame Revolving Door System - Servo Automatic Operation. Non Fire Rated

**Features**

- Revolving door system for non fire rated doors from 1.8m and up to 3.0m in diameter
- Superior aesthetics:
 - Slender framing profile that provides a delicate appearance on a strong structure
 - Internal edges of the wings and not framed by profile and are installed without a centre column
 - Canopy compartment of 40mm in depth (45mm with night closure doors)
- Servo automatic operation, where the door automation responds to light pressure, finger or other, being applied to the door
- Manual door and fully automatic (door is completely controlled by sensors) versions are available
- Suitable for up to 1,300 persons per hour
- Three or four winged versions available
- Break-out and escape route option
- Self-standing air curtain option
- Automatic drive invisible in the floor
- Night closure with mechanical locks

Technical Characteristics



- Profile:
 - 40mm x 20mm (door wings) and 40mm x 30mm (curved enclosure walls)
 - Finishes:
 - Aluminium: Powder coated in standard RAL colours
 - Aluminium: Anodised
 - Stainless steel: Satin, Polished
 - Other finishes available upon request
- Drive: Tormax 5201
 - For 3 or 4 leaved revolving doors with a diameter from 1.8m to 3.0m
 - Extremely shallow crown compartment as the built-in height is only 140 mm

Door Diameter 1.8m - 2.7m


- Use: Single person & person with baggage
- Capacity** - persons per hour: 800 to 1,200
- Passage height: 2.1m - 3.0m*
- Cornice height: From 40mm

Door Diameter 2.7m - 3.0m

- Use: Up to three people & person with baggage
- Capacity** - persons per hour: 1,000 to 1,300
- Passage height: 2.1m - 3.0m*
- Cornice height: From 40mm

** The maximum passage height depends on the diameter, with/without break-out and the exposure to wind that the door will be exposed to*

*** Approximate capacity in single direction*

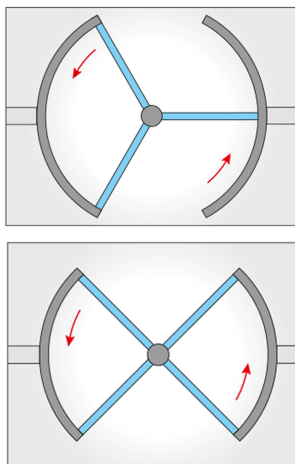


3 or 4 Wing Revolving Doors Options

- 3-wing: Highly suitable for hotels, as the segments are larger than 4-wing doors, providing a larger comfort zone for luggage / large items. The passage width is narrower
- 4-wing: Suitable for all buildings with a large flow of persons. Depending on the diameter, up to 30 percent more can pass through the door per hour. The wider passage allows a two-way traffic to flow much more effectively




Optional Air Curtain

- An air curtain, installed directly in the roof structure of the door, enhances the climatic advantages of the revolving door. The heating is provided via the building's heating system
- Required a cornice height of 350mm minimum

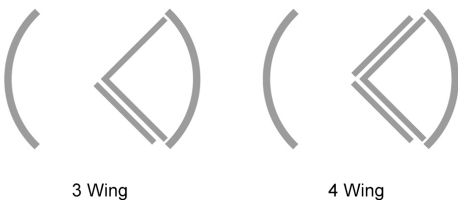

Break-out & Wind Break Option

- All TORMAX revolving door systems are optionally available with wings that can swivel out in any position (break-out). That means even bulky goods can conveniently be transported through the entrance.
- The mechanical emergency opening system (break-out) opens the door wing upon reaching the individually specified force and stops the rotational movement automatically. The door wings can be moved permanently into the open position; the resetting is manual. In situations involving strong wind, the installation of a wind brake is recommended. This is activated via a key-operated switch or a wind measuring system and prevents the doors wings from responding

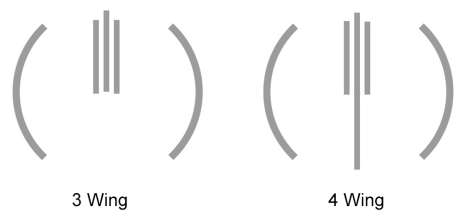

Escape Route

- 3 and 4-wing versions with optional break-out fittings are suitable for escape and rescue routes



Standards

- This product meets / surpasses the following:
- EN 16005: The European standard EN 16005 sets out the design requirements and testing methods used to ensure the safe use of automatic doors
- EN 60335-1: Household and similar electrical appliances. Safety. General requirements
- EN 61000-6-2: Electromagnetic compatibility (EMC)
- EN 61000-6-3: Electromagnetic compatibility (EMC)

Description

Tormax Light Frame Revolving Door System - Servo Automatic Operation. Non Fire Rated

**Specification Text****DOOR AUTOMATION**

- Manufacturer: Tormax
- Product reference: KAD-T/5151LF
- Type: Light Frame Revolving Door System - Servo Automatic Operation
- Revolving light frame door system for non fire rated doors
- Servo automatic operation, where the door automation responds to light pressure, finger or other, being applied to the door
- Door diameter from 1.8m and up to 3.0m in diameter [SPECIFY]
- Passage height up to 2.1m - 3.0m [SPECIFY]
- Cornice height: From 40mm [SPECIFY]
- Suitable for up to 1,300 persons per hour
- Three or four winged versions available [SPECIFY]
- Break-out and escape route option [SPECIFY]
- Self-standing air curtain option [SPECIFY]
- Drive invisible in the floor
- Night closure with mechanical locks
- Profile Finish: [SPECIFY] Aluminium: Powder coated in standard RAL colours, Aluminium: Anodised, Stainless steel: Satin, Polished