KD-9130

Satin Stainless Steel

Description

KCC Overhead Door Closer



Technical Features

EN Power Size	2 to 4
Width of Door (mm)	850 - 1100
Door Width Test Weight (Kg) - see EN1154	40 - 80
Arm Type	Standard 'V'
Closing Mechanism	Rack & Pinion
Power Shoe Arm Bracket	Yes
Angle of Opening	180 Degrees
Power Adjustable by	Position on Door
Adjustable Speed. Sweep/Latch	Yes / Yes
Backcheck	No
Delayed Action Adjustable	No

Hold Open	Optional by Arm (not suitable for Fire Doors)
Non-handed	Yes
Cover	Yes
Application	Fig 1, Fig 61 & Fig 66

Dimensions

Body Length (mm)	268.60
Body Height (mm)	70.10
Body Projection / Width (mm)	40.50

Finishes

Finish without Cover	n/a
Finish with Cover	SSS, PSS, PB, RAL Colour

Certification

European Norm	hEN1154
Product Classification	Figure 1 & 61 ④⑧④①①③ ____②____ Figure 6 ③⑧④①①③
EC Certificate of Conformity No.	2812-CPR-AD0108
Certifire No.	CF5263
Declaration of Performance	DOP001B
Other Test Evidence	n/a

BIM Assist™

CE

Certifire

BC(A)R Assist™*

Guarantee **10 Years**

Last Reviewed	09/03/2026
* ROI Only	

For the purpose of continual product development, KCC reserves the right to change specifications without notice.
Please accept all dimensions as approximate. E&OE. © KCC Group 2026.

www.thekccgroup.com

KD-9130

Satin Stainless Steel

Description

KCC Overhead Door Closer

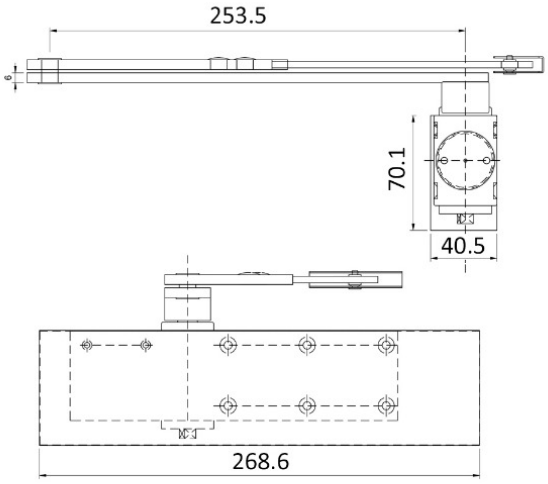

Specification Text

410 OVERHEAD DOOR CLOSERS
· Standard: To BS EN 1154.
- Door closing devices to fire/ smoke control doors: CE marked.
· Manufacturer: KCC Group
- Product reference: KD-9130
· Type: Rack & Pinion Overhead Door Closer c/w Cover
· Power size: 2 to 4
· Other functions: n/a
· Casing finish: [SPECIFY FINISH]
· Operational adjustment:
- Variable power: Matched to size, weight and location of doors.
- Latched doors: Override latches and/ or door seals when fitted.
- Unlatched doors: Hold shut under normal working conditions.
- Closing against smoke seals of fire doors: Positive. No gaps.
412 PERFORMANCE SPECIFICATION FOR OVERHEAD DOOR CLOSERS
· Standard: To BS EN 1154.
- Door closing devices to fire/ smoke control doors: CE marked.
· Minimum classification grades:
- Category of use: 4.
- Durability: 8
- Door closer power size: 2/4
- Suitability for use on fire/ smoke doors: 1
- Safety: 1
- Corrosion resistance: 3
· Type: Rack & Pinion Overhead Door Closer c/w Cover
· Other functions: n/a
· Casing finish: [SPECIFY FINISH]
· Operational adjustment:
- Variable power: Matched to the sizes and weights of doors.
- Latched doors: Override latches and/ or door seals when fitted.
- Unlatched doors: Hold shut under normal working conditions.
- Closing against smoke seals of fire doors: Positive. No gaps.

For the purpose of continual product development, KCC reserves the right to change specifications without notice.
Please accept all dimensions as approximate. E&OE. © KCC Group 2026.

www.thekccgroup.com