


Description

KCC Door Control Security Access Kit: Digital Keypad, Fail Lock Electric Release, Exit Button, Break Glass & PSU



Technical Features

Function & Operation	Electronic digital lock access control system
Summary of Features	Digital Lock Kit - 21 individual user codes, See advanced features

Options n/a

Dimensions

Dimensions See advanced features

Finishes

Finishes Available Digital Lock: Diecast Aluminium Housing

Certification

European Norm	No Harmonised European Norm
Product Classification	n/a (No Harmonised European Norm)
EC Certificate of Conformity No.	n/a (No Harmonised European Norm)
Certifire No.	n/a (No Harmonised European Norm)
Declaration of Performance	n/a (No Harmonised European Norm)
Other Test Evidence	n/a

BIM Assist™

BC(A)R Assist™*

Guarantee

1 Year

Last Reviewed

27/11/2019

* ROI Only

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2025.

Description

KCC Door Control Security Access Kit: Digital Keypad, Fail Lock Electric Release, Exit Button, Break Glass & PSU



KAC-DG15LD Digital Keypad

- 21 user codes, 4 or 5 digit
- Die-cast Aluminium
- 12v or 24v DC
- 12 Digit Backlit Keypad
- Output: 2 Relays
- Door Reed Switch Input for Anti-Tailgating
- Fully Programmable Via Keypad and Master Code
- Red, Green & Yellow LED Indicators
- H123mm x W77mm x D64mm



KES-M1 LOCK

- Fail Lock Electric Strike
- Site selectable 12v AC or DC
- Mortise and surface plates included
- Body L98mm x W28mm x D19mm
- Small plate L105mm x W50mm x D3mm
- Large plate L160mm x W25mm x D3mm



KEA-DRB001N-PTE Exit Button

- White Plastic, Requires Single Gang Backbox
- Marked 'Press to Exit'
- COM/NO/NC Change Over Contacts
- Engraved
- H85mm x W85mm x D8mm



KEA-CP21N Break Glass Unit

- Green Plastic
- Break Glass
- Surface Mounted
- COM/NO/NC Change Over Contacts x 2
- Two Pole
- H88mm x W88mm x D60mm



KAC-PS1A 12VS Power Supply Unit

- Boxed Power Supply Unit
- Power Input 220vAC
- Power Output 12vDC 1AMP
- Battery Charging Unit
- Built-in Timer Circuit
- H225mm x W195mm x D80mm

Description

KCC Door Control Security Access Kit: Digital Keypad, Fail Lock Electric Release, Exit Button, Break Glass & PSU




Specification Text

GENERAL ACCESS CONTROL

-Manufacturer : KCC Group

-Product reference: KAC-ONE K1

-Type: KCC Door Control Security Access Kit: Digital Keypad, Fail Lock Electric Release, Exit Button, Break Glass & PSU

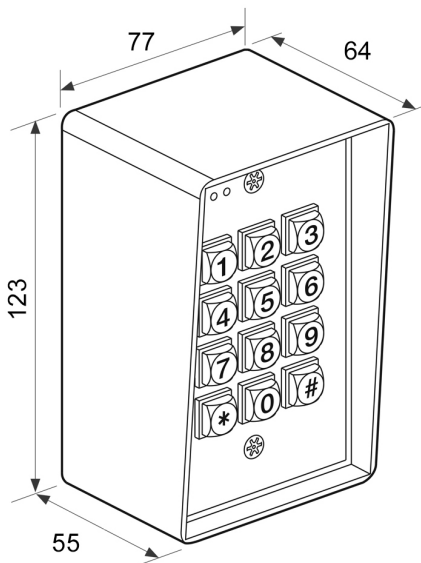

For the purpose of continual product development, KCC reserves the right to change specifications without notice. Please accept all dimensions as approximate. E&OE. © KCC Group 2025.

www.thekccgroup.com